

IS 7 - IS 8.1



Control panel



Yanmar 1500 RPM engine



Input/output fuel pipe



compact design 

easy installation 

super silenced 

The intercooler W/A assures the perfect functioning of the generator independently of the external ambient temperature, therefore the alternator and the engine will work at ideal temperature optimizing the performance and reliability of the gen-set.

The generator may be installed in any room on the vessel without the need of ventilation blowers. Extremely compact and quiet, the generator is equipped with a double shock absorbing system to increase comfort: the first one absorbs vibrations from engine-alternator to the frame, the second one absorbs residual micro-vibrations from frame to vessel.

We reserve the right to modify the data, images and drawings in this document without prior notice.

For more detailed information, please contact your local distributor or Mase Generators S.p.A.



Mase Generators spa

Via Tortona, 345 - 47522 - Cesena (FC) - Tel. +39 0547 354311

www.masegenerators.com - commercial@masegenerators.com

mase
GENERATORS
Believing in change.



Output power 6,7 kW 50 Hz - 7.8 kW 60 Hz

Control panel

- CBU EVO IL4 device controls and drives the genset. A large display and control pushbuttons allows an easy use and monitoring of the unit:
- Manual start
- Voltage Vac
- Frequency Hz
- Hour meter
- Genset Battery voltage
- Low oil pressure alarm
- Engine preheating
- Warning and shutdown alarm
- Alternator battery charger failure alarm
- Protection alarm for frequency and rpm
- Alarm history
- Maintenance warning
- General alarm outlet
- RUN outlet
- Ready outlet
- Programmable AUX outlet
- Emergency stop button
- Thermal and magneto-thermal protection

Engine


- Easy maintenance access to the feeding and lubrication system, the sea water pump and the air filter
- Double vibration dumping system
- Oil drain pump

Soundproof cabin

- Made of extremely light marine aluminum with very high resistance to external agents

Insulated poles kit (for metal hull boats), dry exhaust kit and keel cooling kit are available on request

TECHNICAL DRAWINGS

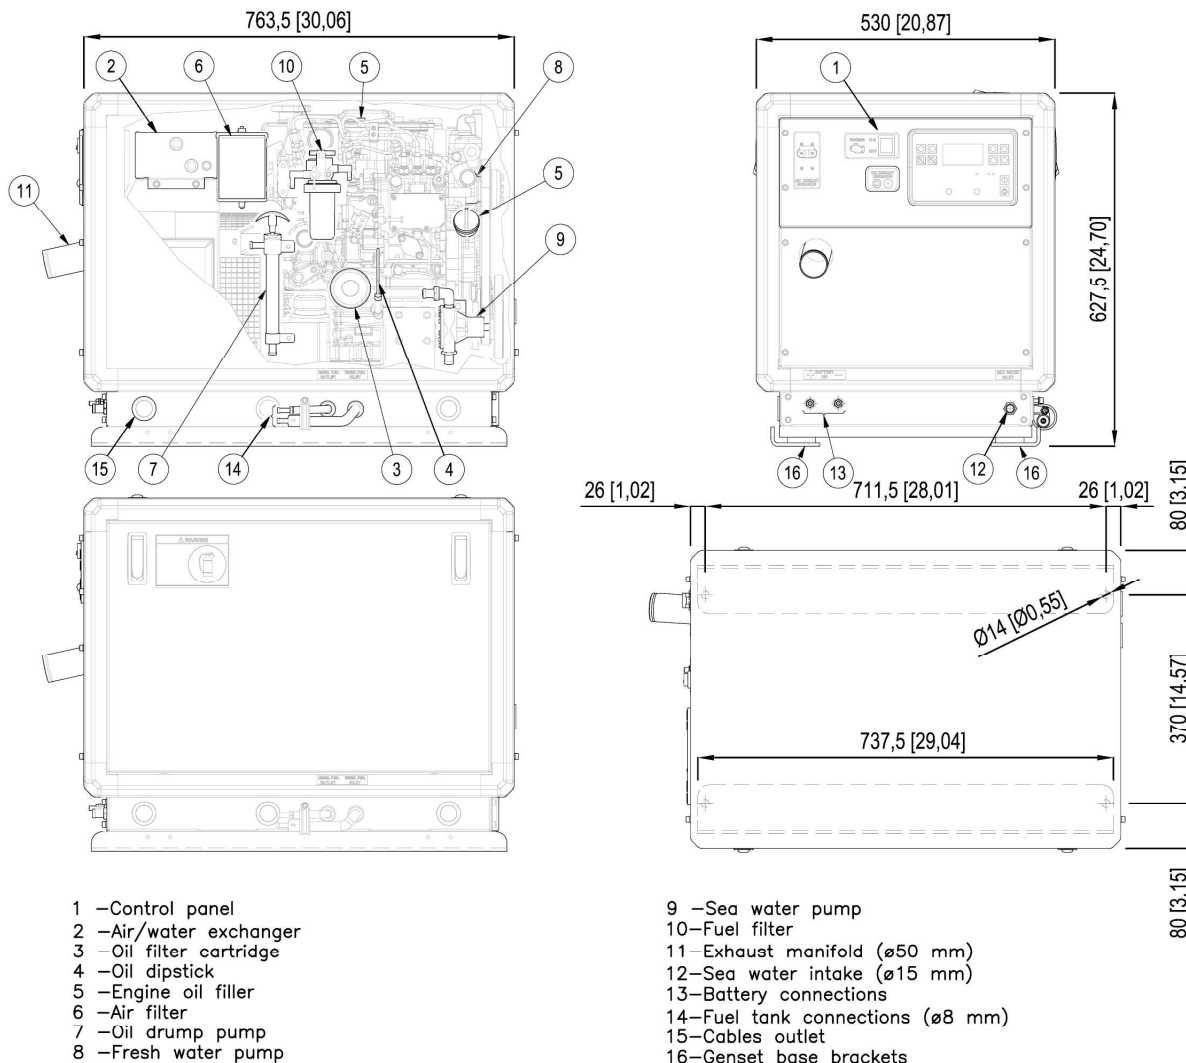



Output power 6,7 kW 50 Hz - 7.8 kW 60 Hz

50 Hz

60 Hz



AC alternator	Synchronous, 4 poles, brush less, with capacitors	
Cooling	Air/water (Intercooler W/A)	
Voltage	115 - 230 V	120 - 240 V
Frequency	50 Hz	60 Hz
Amps	58.3 - 29.1	65 - 32.5
Max. Power	6.7 kW	7.8 kW
Continuous power	6.2 kW	7.2 kW
Power Factor	1 cos ø	
Insulating class	H	
Voltage stability	±10%	
Frequency stability	±5%	

The power is referred to a sea water temperature up to 31°, an atmospheric pressure of 100 KPa and a humidity percentage of 30%

Model	Yanmar 3TNV80F	
Type	Diesel 4 stroke	
Cylinders	nr 3	
Cylinder block material	Cast iron	
Bore	80 - 3.14 mm-in	
Stroke	84 - 3.30 mm-in	
Displacement	1267 - 77.3 cc-CID	
Power	12.74 - 9.5 hp-kWm	14.35 - 10.7 hp-kWm
RPM	1500	1800
Compression ratio	23.1	
Combustion system	Indirect injection	
Engine head material	Cast iron	
Speed governor	Centrifugal mechanical	
Lubrication system	Forced	
Oil sump capacity with filter	3.5 - 0.92 l-gl	
Engine stop system	Stop solenoid	
Fuel pump	Electric	
Max. fuel pump head	70 - 2.29 cm-ft	
Fuel consumption	2.3 - 0.60 l/h-gl/h	2.6 - 0.68 l/h-gl/h
Air intake	790 - 208 l/min-gl/min	904 - 238.81 l/min-gl/min
Starting battery	70 - 12 Ah-V	
Battery charger	40 - 12 Ah-V	
Starter battery	0.9 - 12 kW-V	
Max. inclination	25°	
Water pump flow	25 - 5.4 l/min-gl/min	28 - 6.1 l/min-gl/min
Sea water inlet pipe ø	16 - 0.62 mm-in	
Exhaust pipe ø	50 - 1.92 mm-in	
Input/Output fuel pipe ø	8 - 0.31 mm-in	

Dimensions (L x W x H)	763.5x530x627.5mm - 30.06 x 20.87 x 24.7 in (with soundproof box)	
Weight	230 Kg - 432 lb (with soundproof box)	
Noise Level	49 dBA a 7 mt	51 dBA a 7 mt



Output power 6,7 kW 50 Hz - 7.8 kW 60 Hz

Accessory

Code

Accessories on request

1. Remote control panel START/STOP with 20 mt cable for Comap	037561
2. Remote control panel for Comap IL4 with 20mt cable	039607
3. Exhaust kit: sea water lock, silencer, outlet D.50 MASE	04658
4. Siphon break D.16	04290
5. Filtering kit: sea water inlet, sea water strainer, taps, fittings D.16	04349
6. Supersilent exhaust kit & exhaust gas separator D.50 MASE	010078
7. Centek 2" Muffler	71155
• Mase Muffler D.50	70795
8. Water/exhaust gas separator - 2" Centek	71156
• Transmitter kit: oil/water	011084
• Mase Silencer D.50	71809



1




2



3



4

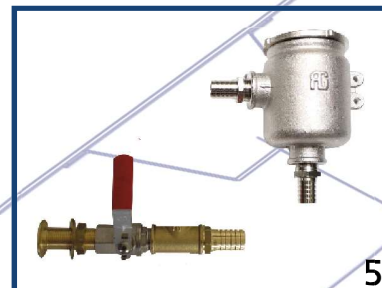

5



6



7



8

Note
